


"Cue-frr-v1" Native Endpoint Design



- + Can focus effort on improving/expanding NB API to all daemons
- + Simple and predictable access to FRR's native structure
- ⚠ Doesn't expose XPaths (is this a drawback?)
- ⚠ Must monitor upstream Yang models for changes
 - Do we guarantee this API will not introduce breaking changes over time? Not important for native but still worth noting for translated endpoints

Routing Requests to daemons

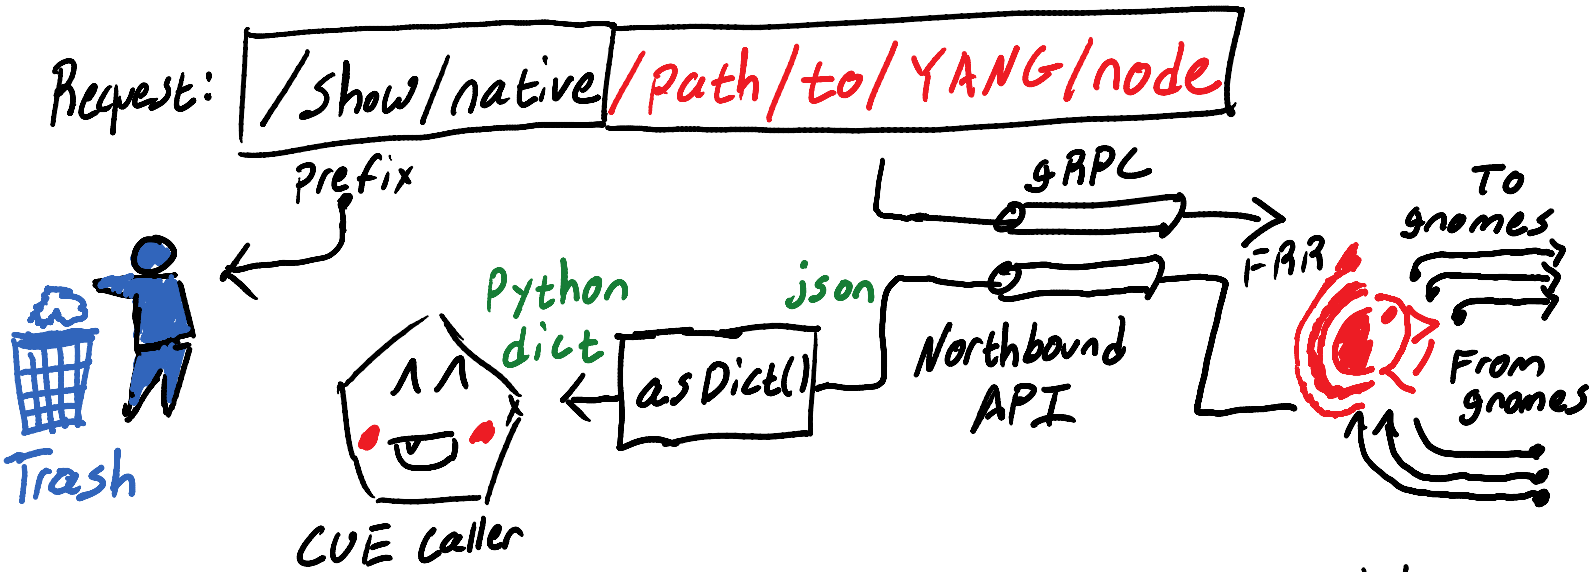